

Hook trolley 20 pairs of surgical clogs

Product code	Type
7506173	HAW 605/620/1620 1/4HP 4Ko

FUNCTIONAL DESCRIPTION

The Hook trolley 20 pairs of surgical clogs by Hupfer serves the provision and transport of surgical clogs.

- Hygienic stainless steel surfaces ensure easy cleaning and maintain sterile conditions
- Hooks designed for sterile goods baskets provide organised and secure storage
- High manoeuvrability with swivel castors and total locks enables smooth transport and stable positioning
- Dedicated basket for surgical shoes supports efficient and hygienic shoe handling
- Robust stainless steel construction guarantees durability and long-term reliability in medical environments

EQUIPMENT FEATURES

Hygienic stainless steel surfaces

Hygienic stainless steel surfaces ensure a low-germ environment. The smooth, non-porous structure can be cleaned quickly and without leaving any residue. This saves you time, reduces cleaning costs and meets strict hygiene standards – ideal for commercial kitchens and medical areas. Robust, durable and reliable in daily use.

Basket for surgical shoes

The robust stainless steel wire basket provides secure storage for surgical shoes and enables cleaning, drying, storage and dispensing with a single basket. This all-in-one solution optimizes workflows in the operating theatre and ensures the highest hygiene standards.

Hooks for sterile goods baskets

The integrated hook system enables the flexible attachment of mesh baskets, sterile supply containers and sterile supply baskets. Maximum flexibility for optimum use of space in sterile processing.

High Manoeuvrability: 4 swivel castors, 2 with total locks

Four smooth-running swivel castors, two with total locks, enable precise manoeuvring in tight spaces and secure locking during operation. This equipment ensures optimal mobility while maintaining high directional stability and security.

GENERAL TECHNICAL DATA

Rated capacity


Position	Rated capacity	Quantity
Total	Pairs of operating theatre shoes	20
Width actual	605 mm	
Depth actual	620 mm	
Height	1.620 mm	
Weight	17 kg	

Project _____

Order _____

Quantity _____

Date _____

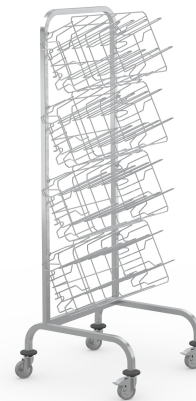

Payload	240 kg
Main material	Stainless steel

HOOK PROPERTIES

Number of hooks	8
Number of hook pairs	4
Load capacity per hook	30 kg
Hook pitch	320 mm

MOBILITY

Set of castors	2 swivel castors with brakes 2 swivel castors
Castor attachment	Back hole
Castor bearing material	Galvanised steel
Castor bearing type	Ball bearing
Castor housing material	Steel (galvanised)
Wheel ø	75 mm
Type of tyre tread	Rubber – Standard
Wheels with thread guard	Yes
Antistatic wheels	Yes
Impact protection construction	Deflector rollers